

DCMTech Rotary Surface Grinders

**Call Today!!!
(800)533-5339**



Providing quality machine tools and customer satisfaction since

IG 380 SD Industrial Rotary Surface Grinder

DCM Style Grinding -

Vertical Spindle Rotary Table

DCM-Tech designs & builds base machines with standard features and customized options to meet customer application requirements. Our extensive grinding experience and Superabrasive inventory assure efficient sample grinding and process development. Factory Based Technical Specialists combine these responsibilities with machine set up and technical support for all DCM products.

Grinding Spindle

Variable speed 30HP grinding spindle motor with preloaded precision bearings.

Variable Speed Rotary Table

Variable strength electromagnetic chuck with automatic demag cycle. Variable speed table for optimum surface finish and production efficiency.

Mist Collection

Integral air mist collection system draws particulates and mist away from the work area, enhancing machine cleanliness and work environment.

Coolant System

Includes through spindle and external coolant flow as well as self contained filtration system.

Manual Pulse Generator

Handwheel provides precise, effortless control of Z axis spindle positioning. Three selectable feed rates with steps of .010 in., .001 in., and .0001 in.



Contact Us:



(800)533-5339



(507)452-7970



www.dcm-tech.com



**4455 Theurer Blvd.
P.O. Box 1304
Winona, MN 55987**



fb.com/DCMTech1




twitter.com/DCMTech1

DCM Tech

Rotary Surface Grinders

The heart of the IG 380 SD is DCM's proven Process Control System and operator interface. The high visibility LCD screen provides a plain text view of all grinding parameters, rapid retrieval of all saved programs, and quick entry of new ones. Grinding parameters may be edited "on the fly" allowing the operator to fine tune an operating program without stopping a grinding cycle. Selectable Grinding Programs are included on "SD" series grinders to provide the maximum flexibility in processing a wide range of materials:

- Grind from Zero — grinding proceeds a programmed amount below an operator set "0" point. A single button push sets "0" at any Z axis position.
- Grind to Height — grinding proceeds from an operator entered rough dimension to a pre-programmed finish dimension. Actual dimensions are used, and can be referenced from the machine table, grinding fixture, or a setting gauge.

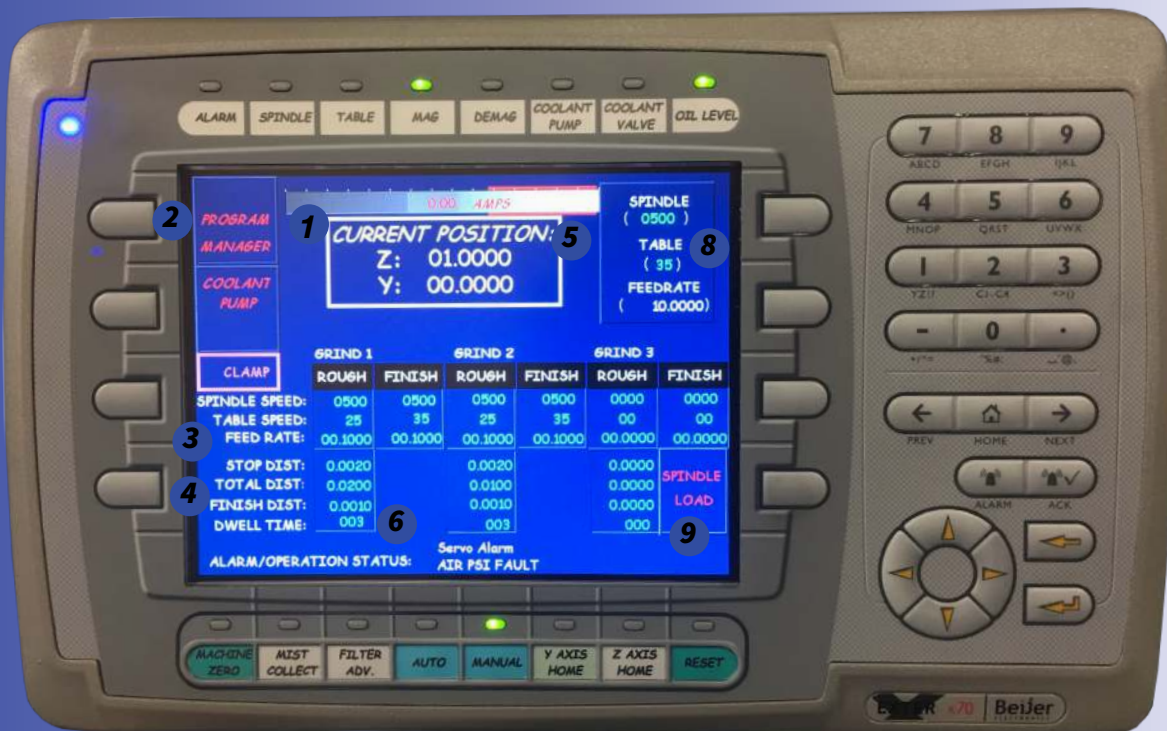

1 Spindle Monitor features a bar graph display of spindle motor load. A secondary screen can be accessed to present a full screen real time graph of spindle loading. This provides important data regarding wheel performance and input for setting maximum spindle load. The downfeed is programmed to pause if spindle load exceeds desired limits. This is especially important with fragile workpieces where stress and heat can because damage.

2 Program Manager provides access to an additional screen that contains parameter settings for maximum spindle motor load, magnet alarm, automatic coolant system activation, wheel wear compensation, auto dress option and auto air mist collection.

DCM Tech

Rotary Surface Grinders

- 3 Speeds and Feeds** automatically transition from ROUGH to FINISH grinding at a pre-set point during the grinding cycle. This optimizes grinding wheel performance for both stock removal and surface finish.
- 4 Distance** or “Z” axis feed can be entered as grinding feed amount or as a part dimension. Feed is an amount below a selected “0” point and a part dimension is a height above the machine table, or grinding fixture, as set by the operator. Inch units to .0001”, and metric to .001 mm resolution may be entered.
- 5 Current Position** displays wheelhead location in reference to the operator defined Z and Y axis machine zero position.
- 6 Dwell** or spark out time is the non-feed portion of the grinding cycle. In this case the dwell time is 60 seconds. At completion, the wheelhead will retract and shut down, allowing for removal of the part or repositioning for the next grind cycle.
- 7 Specialized Workholding Systems** Vacuum chucks, T slot tables, through table feed for hydraulic & pneumatic fixtures, and magnetic chucks are all available.
- 8 Manual Operation** values are displayed here. Downfeed is controlled by the manual pulse generator handwheel. If the grinder is in the Auto mode, the RPM and feedrate at each point in the grinding cycle appear in this area.
- 9 Single or Multi-Step Grinding** is available in all programs. Up to three sequential grinds are available. Parts can be ground on one side, flipped over, and finished on the otherside. Many parts can benefit from a third grind to remove minor distortion that occurs as a result of stress relieving during the grinding process. Each grind step picks up where the last left off, saving cycle time and enhancing precision.



Wheel Hub with Segments



Product Number
03-13267

Abrasive Options include a combination 20" diameter Segmented and 2A2T ring wheel hub, with other wheel mount options available. Correct wheel speed for a wide range of wheel diameters and abrasives is set using the variable speed spindle feature on the IG 380 SD. The #50 taper spindle facilitates rapid changing of wheel hubs.

DCMTech Rotary Surface Grinders

**Call Today!!!
(800)533-5339**



Providing quality machine tools and customer satisfaction since 1974

General Specifications

Motors

Grinding Spindle Motor 30HP, 600 - 1800 RPM
Rotary Table Motor 3 HP, 10-70 RPM
Servo Column Motor 2 KW, 0 - 100 IPM
Y Axis (cross slide) Motor Variable Speed AC 1/4" HP
Coolant Pump 3/4 HP

Table

36" Diameter – Through Spindle Vacuum/Pressure Feed

Capacity

Maximum Swing Diameter 40"
Maximum Wheel to Table Clearance 11" With Segment
Wheel

Grinding Wheel

Standard 20" diameter

Feed System

Servo driven Z Axis with Precision Ballscrew and Encoder
Feedrate Variable from 0.0001 IPM to 60 IPM
DC Motor X Axis Position

Electrical Requirements 460/380V 50/60

Hz, 3ph, 80 Amps.

Dimensions 96" wide, 62" deep, 90" high

Weight 10,500 lbs.



Integral mist collection and swarf removal heighten the cleanliness of the grinding process. The IG 380 SD is a low impact machine for the shop

Check out our complete line of surface grinders



IG 280 SD



IG 180 SD



IG 140 SD



IG 080 SD

DCM designs and builds a line of Industrial Rotary Surface Grinders and Automotive Rebuilding equipment. We have provided quality machine tools and customer satisfaction since 1974. Our response to customer needs over the years has allowed us to provide long lasting, application specific solutions to customers worldwide. Use of the DCM Tech Vertical Spindle Rotary Table Surface Grinders has consistently brought dollars to our customers' bottom line via process improvement.